



ROTECH FOR RELIABILITY!

*Why Accept Anything Less?*

BRAD® CONNECTIVITY


## AE 2000-RS Series Aluminium Body

HEAVY DUTY – END OF SHAFT


The AE 2000-RS series of Rotech shaft mounted motion sensors & encoders are manufactured in an extremely tough and durable aluminium casting with an industrial powder coated finish as well as being fitted with the Brad® Quick connectivity range of 3 & 4 pin receptacles for easy on site electrical termination.

Installation is simple and easy, just one 12mm threaded hole in the end of the shaft being monitored or fitted using the unique “Mag-Con” magnetic connector as shown below.

A wide range of number of pulses per revolution are available together with AC and DC electrical outputs. Quick connectivity using the standard Brad® Mini – Change® Connectors as shown below.

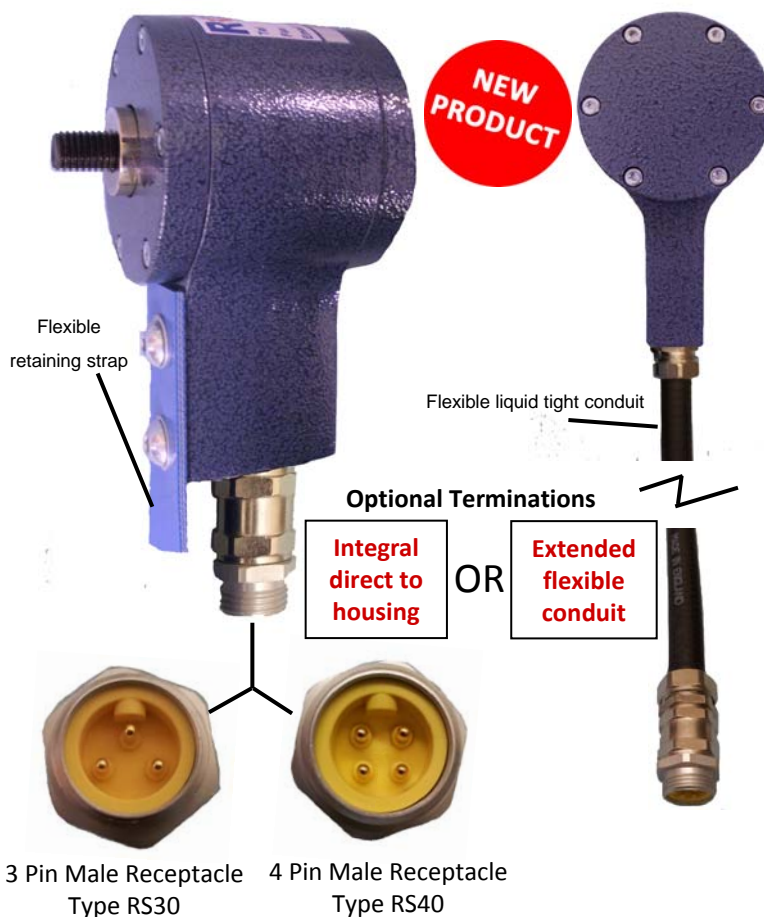

### APPLICATION EXAMPLE:

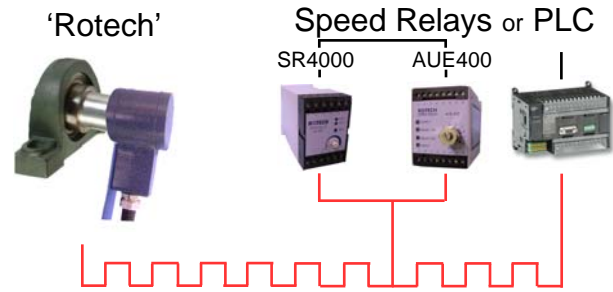

### FOR MONITORING:

- Speed
- Distance
- Direction
- Belt slip
- Shaft stopped
- Underspeed
- Overspeed
- Safety guards interlocking

### FEATURES:


- Totally self contained (no guards required)
- Maintenance free for maximum reliability
- 1 to 1000 pulses per revolution
- Environment ingress-IP67
- -25 to +70, 100, 125, 150 deg Celsius versions available




### MAG-CON MAGNETIC CONNECTOR

For quick and easy installation of Rotech shaft mounted sensors & encoders

**IMPORTANT NOTE:**  
**MAXIMUM OPERATING SPEED IS 300RPM**  
**RECOMMENDED MINIMUM**  
**SHAFT DIAMETER FOR FITTING=35MM**

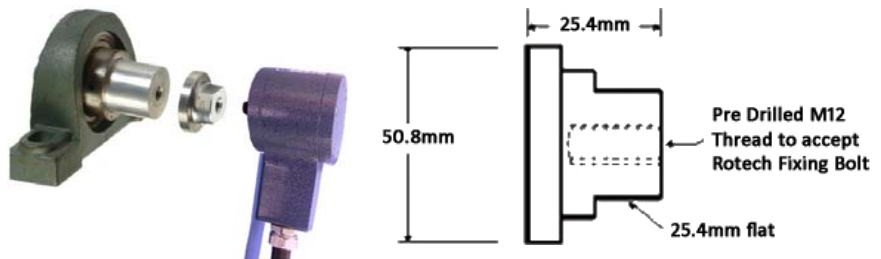

# Dimensions and Installation Information

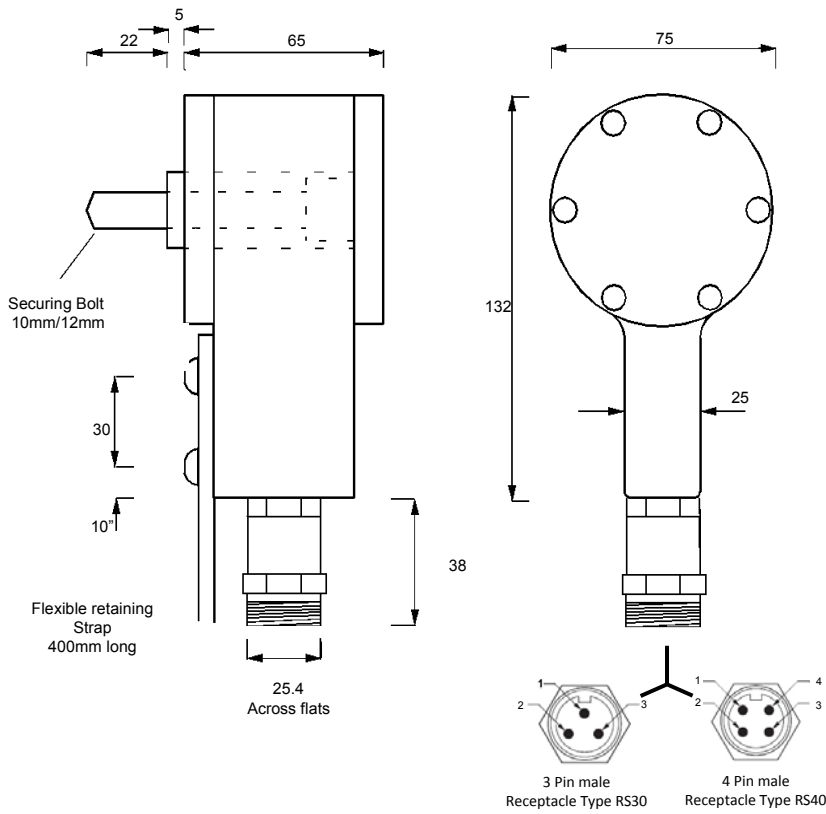

Dimensions shown in Millimetres

## RS30/RS40 Connection options available

Female Chassis/Conduit Plug




Female Cable Plug




### Cable Plug Views

3 Pin Female Connector Type RS30



4 Pin Female Connector Type RS40



Refer to electrical outputs below for pins designation

### Cable Cores Identification

#### RS30

1. Black
2. Brown
3. Blue

#### RS40

1. Black
2. Blue
3. Brown
4. White


### Available Pulse Rates (PPR)

1,2,4,5,6,8,10,12,16,20,30,32,40,50,60,100,120,180,240,250,300,360,500,1000 (Dependent Upon Output Type)

## Electrical Outputs

Type Z (2 Wire Non Polarized) 10-30Vdc


RS30



Max frequency = 1500Hz

Type E (N.P.N) 10-30Vdc Current sink


RS40



Max frequency = 600Hz

Type E2 (P.N.P) 10-30Vdc Current source


RS40



Max frequency = 600Hz

Type E3 (N.P.N + P.N.P - 3 wire) 10-30Vdc Bi-polar - Current sink/source


RS40

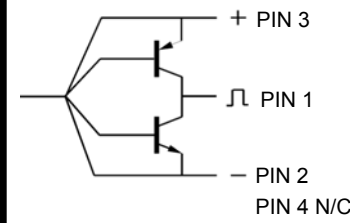

Max frequency = 1000Hz

Type E4 (N.P.N + P.N.P. - 2 Wire) 10-30Vdc Bi-polar - Current sink/source


RS30

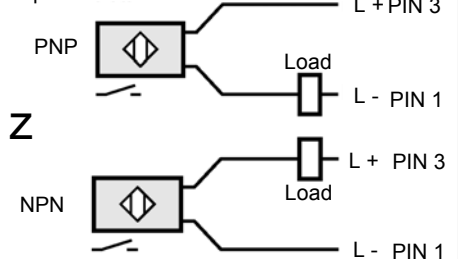

Max frequency = 1300Hz

Type W 20-240V AC/DC 50/60Hz (1 to 30 PPR only)

RS30

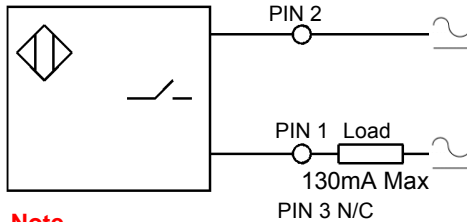


Note Minimum operating current = 5mA

Max frequency = 25Hz (AC) 1000Hz (DC)

Type IEC- IECEx approved 8-2 Vdc (1KΩ) Intrinsically safe Hazardous circuits

RS30

The voltage and current characteristics of these sensor outputs are so low that they can be safely used in explosive environments. The power limitation is implemented in the corresponding equipment. This means that the circuit containing this sensor is only intrinsically safe if it is supplied via a corresponding isolating amplifier. Contact Rotech Systems for details of amplifiers available.

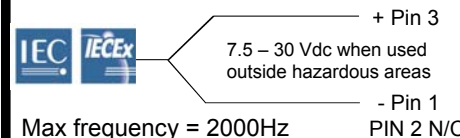

Max frequency = 2000Hz



Website: [www.rotechsystems.com.au](http://www.rotechsystems.com.au)

Email: [info@rotechsystems.com.au](mailto:info@rotechsystems.com.au)



Monitoring the world since 1983