

ROTECH FOR RELIABILITY!

Why Accept Anything Less?

PWE 6000 Series Conveyor Belt Wheel Sensor Utilising PE4000 Series Sensors





For monitoring belt speed, slip & distance measurement

Tough, robust and easily installed, units are designed for long and durable service in the harshest of environments.

For monitoring:

- Belt speed
- Belt slip
- Belt Stopped
- Belt Weighers (Tachometer)
- Distance/length measurement
- Rotation control/sequencing

APPLICATION EXAMPLE:

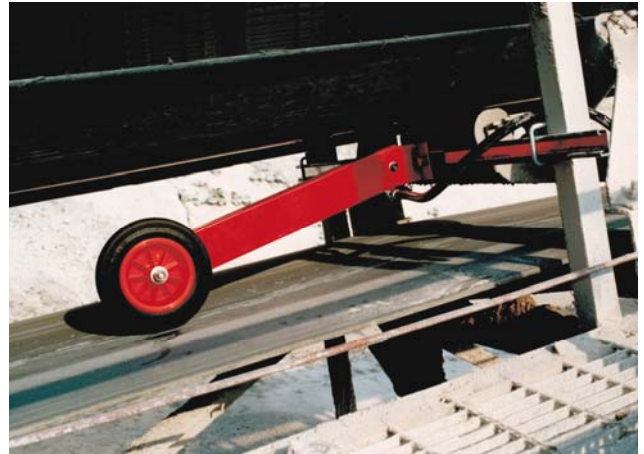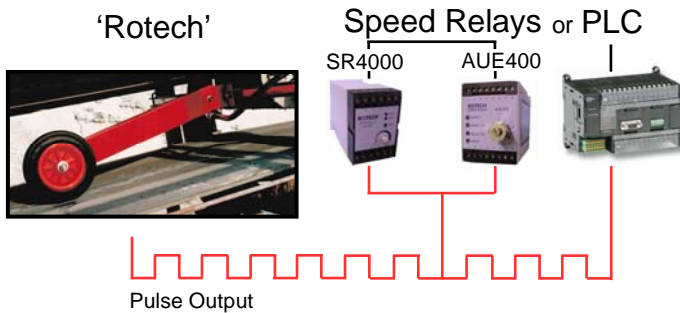


FEATURES:

- Open frame & self contained trailing arm running on return side of conveyor belt
- Maintenance free for maximum reliability
- Non standard wheel diameters available
- "Rapid fix" installation kits available
- 1 to 1000 pulses per revolution (multiple outputs ac/dc supply voltages)
- Environment ingress - IP66
- 25 to +100 deg Celsius versions



Dimensions and Installation Information

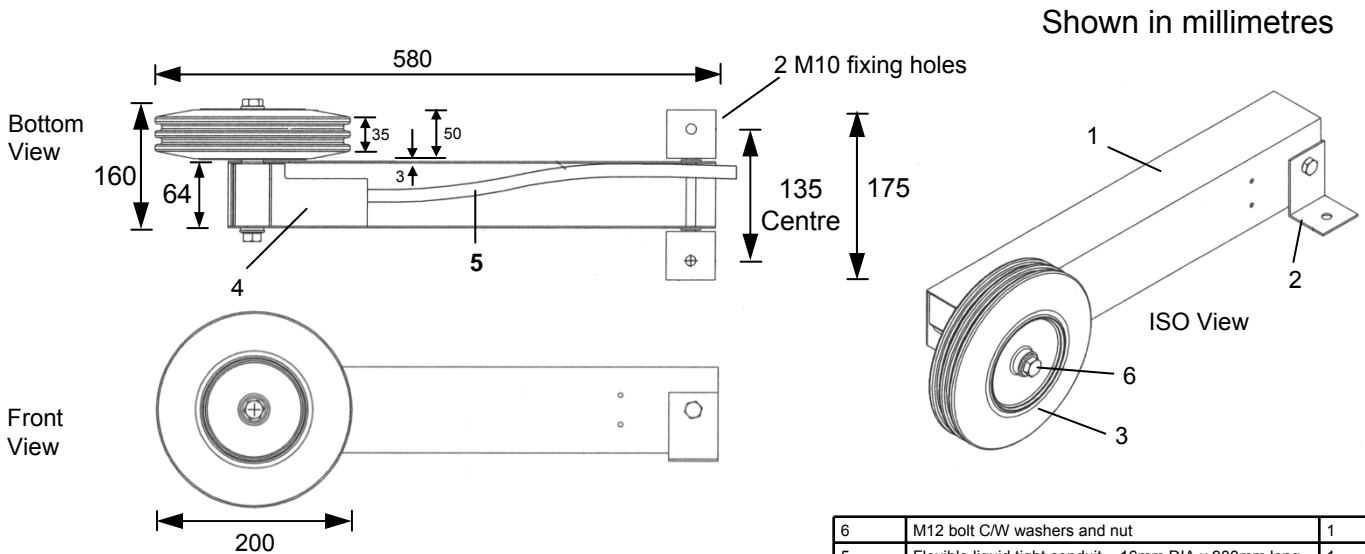

Shown in millimetres


Electrical Outputs

Available Pulse Rates (PPR)

1, 2, 4, 5, 6, 8, 10, 12, 16, 20, 30, 32, 40, 50, 60, 100, 120, 180, 240, 250, 300, 360, 500, 1000
(Dependent Upon Output Type)


6	M12 bolt C/W washers and nut	1
5	Flexible liquid tight conduit – 16mm DIA x 900mm long	1
4	PE4000 Series unit	1
3	Solid rubber wheel	1
2	Pivot bracket	2
1	Fabricated steel enclosure	1
Item	Description	Qty

Type Z (2 Wire Non Polarized)
10-30Vdc




Max frequency = 1500Hz

Type E (N.P.N) 10-30Vdc
Current sink




Max frequency = 600Hz

Type E2 (P.N.P) 10-30Vdc
Current source




Max frequency = 600Hz

Type E3 (N.P.N + P.N.P – 3 wire)
10-30Vdc
Bi-polar – Current sink/source




Max frequency = 1000Hz

Type E4 (N.P.N + P.N.P. – 2 Wire) 10-30Vdc
Bi-polar – Current sink/source

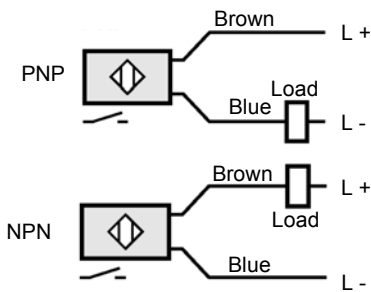

Max frequency = 1300Hz

Type W 20-240V AC/DC 50/60Hz
(1 to 30 PPR only)

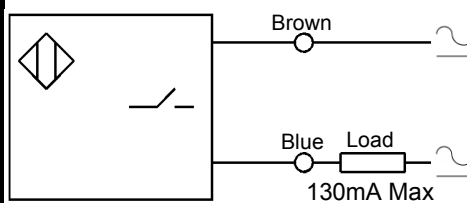

Note
Minimum operating current = 5mA

Max frequency = 25Hz (AC) 1000Hz (DC)

Type IEC- IECEx approved 8-2 Vdc (1KΩ)
Intrinsically safe Hazardous circuits


The voltage and current characteristics of these sensor outputs are so low that they can be safely used in explosive environments. The power limitation is implemented in the corresponding equipment. This means that the circuit containing this sensor is only intrinsically safe if it is supplied via a corresponding isolating amplifier. Contact Rotech Systems for details of amplifiers available.




7.5 – 30 Vdc when used outside hazardous areas

Max frequency = 2000Hz

Type E3 Q (Quadrature) 10-30Vdc

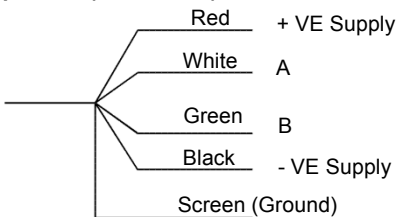


CH "A" Leads CH "B" for clockwise rotation viewed from shaft end of encoder

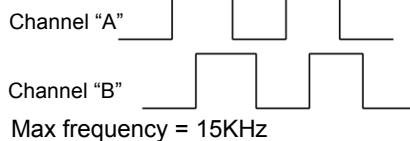

Max frequency = 15KHz

Type E2 Q (Quadrature)

1 to 40 PPR inclusive

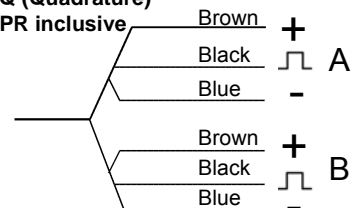

Max frequency = 600Hz



Website: www.rotechsystems.com.au

Email: info@rotechsystems.com.au



Monitoring the world since 1983